



SINCE 1905

# Wilson Safe Company

Service You Deserve, Tradition You Trust

## Wilson Torch TRTL-30x6



The Wilson Torch TRTL-30x6 is built with the latest, most revolutionary materials that form the strongest safe to pass the most severe test at Underwriters Laboratories Inc. Massive aluminum plates, stainless steel, and copper make this safe one of the most formidable defensive barriers ever offered. The safe provides 30 minutes of protection on all six sides from torch and tools.

- **DOOR & BODY:** The door has a thickness of 6". The safe has a total body thickness of 3½". A very specific formulation of the best quality of aluminum, stainless steel, and copper is used to build the door and body of the safe and exceeds the UL standard for this type of safe to withstand the most sophisticated attack by tools and torch.
- **LOCKS:** UL listed manipulation resistant high strength Group 2M or Group 1 combination lock with spy proof dial is used on all TRTL-30x6 safes.
- **BOLTWORK:** Massive 1½" diameter stainless steel bolts are driven both horizontally and vertically through reinforced bolt chambers by the safe's three-way boltwork mechanism. The hinge side of the door is protected by a bar of stainless steel that fits into similar reinforced bolt chambers.
- **GLASS RELOCKERS:** A large tempered glass plate is used to protect vital areas of the locking mechanism. If attacked, the glass will shatter and cause the relockers to activate, thereby preventing the safe from being opened.
- **INTERIOR:** Adjustable removable shelves.

# Wilson Torch TRTL-30x6

## SPECIFICATIONS


| MODEL     | Inside Dimensions* |    |    | Outside Dimensions* |    |    | Weight** | Door Swing |      |      | Shelves |
|-----------|--------------------|----|----|---------------------|----|----|----------|------------|------|------|---------|
|           | H                  | W  | D  | H                   | W  | D  |          | 90°        | 150° | 180° |         |
| TR-252016 | 25                 | 20 | 16 | 33                  | 28 | 33 | 1500     | 61         | 39¾  | 56¾  | 2       |
| TR-352420 | 35                 | 24 | 20 | 43                  | 32 | 31 | 2670     | 63         | 43¾  | 60¾  | 2       |
| TR-552420 | 55                 | 24 | 20 | 63                  | 32 | 31 | 3790     | 63         | 43¾  | 60¾  | 4       |
| TR-642023 | 64                 | 20 | 23 | 72                  | 28 | 34 | 4100     | 62         | 39¾  | 56¾  | 4       |
| TR-683120 | 68                 | 31 | 20 | 76                  | 39 | 31 | 4400     | 70         | 50¾  | 67¾  | 5       |
| TR-683626 | 68                 | 36 | 26 | 76                  | 44 | 37 | 5500     | 81         | 55¾  | 72¾  | 5       |

\* Dimensions are in inches. Measurements include handle and hinge projections. Dimensions Tolerance - ±0.5"


\*\* Weight tolerance ± 5%"

### ADD-ONS


- Left Swing - Optional (Special order, no upcharge)
- Preparation (only) for movement time-lock (No charge, by request)
- Custom interior secured compartments (By request)
- Additional shelves (By request)




TR252016




TR352420




TR552420

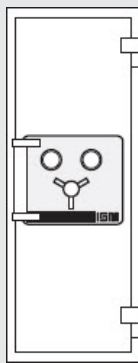

TR642023

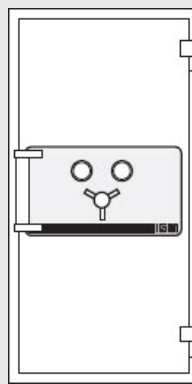

TR683120

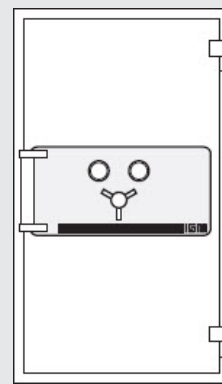

TR683626

